



SPH-DWJT

CENTRIFUGAL HORIZONTAL MULTISTAGE PUMP

Centrifugal horizontal multistage, electric, single-body pump, in stainless steel, impellers and diffusers in stainless steel, operating water temperature 70° (air temperature 40°), low noise.
Available in single-phase and three-phase versions.

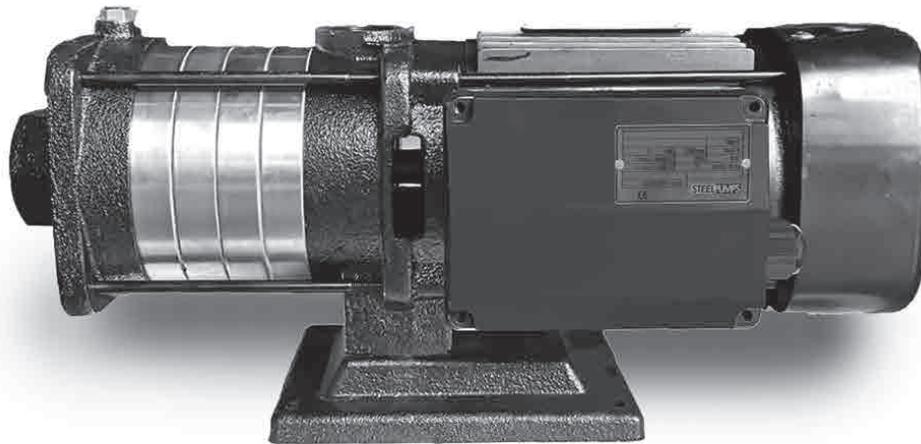

HYDRAULIC PERFORMANCE

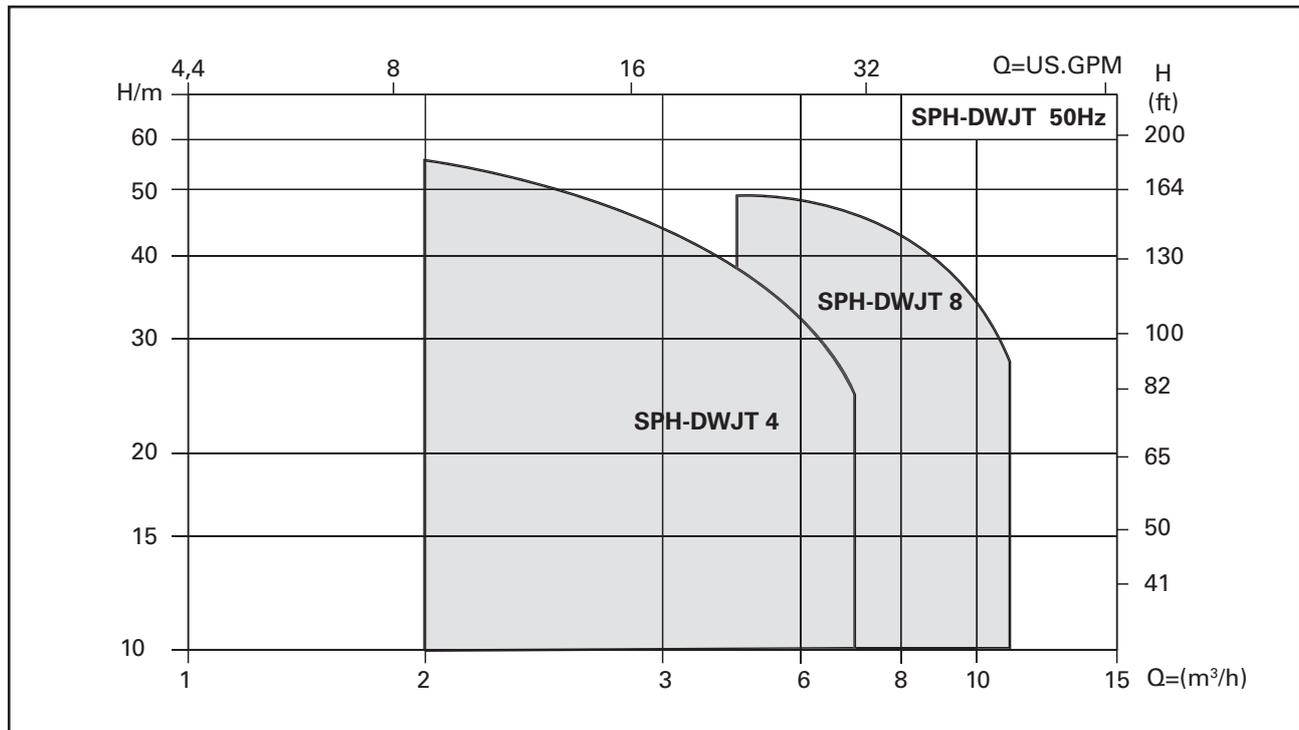


PUMP PERFORMANCE

Type	kW	HP	Q = (m ³ /h)	1	2	3	4	5	6	7
SPH-DWJT 4-5	1,0	1,2	H (m)	46	44	41	38	32	26	20
SPH-DWJT 4-6	1,1	1,5		55	53	50	45	37	31	26

Type	kW	HP	Q = (m ³ /h)	5	6	7	8	9	10	11
SPH-DWJT 8-4	1,5	2,0	H (m)	39	38	36	34	30	26,5	22,5
SPH-DWJT 8-4T	1,5	2,0		39	38	36	34	30	26,5	22,5
SPH-DWJT 8-5T	2,2	3,0		49	47	45	42,5	38	33,5	28

Series 2

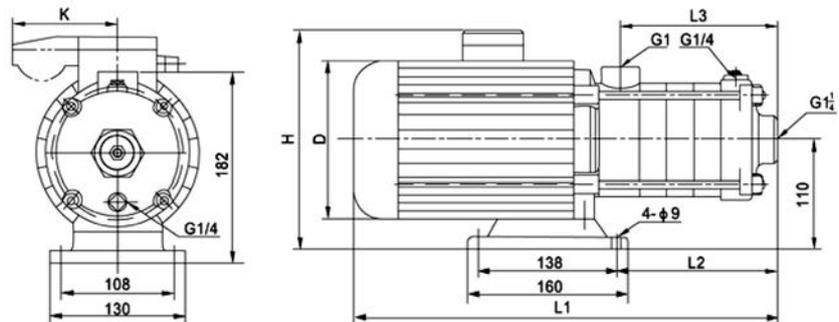

Series 8

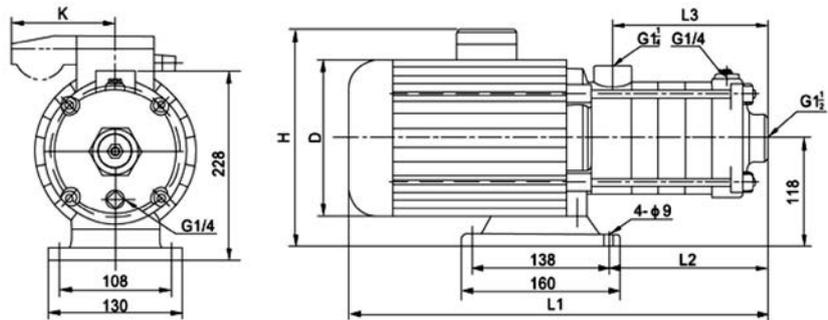


TABLE OF SIZES AND WEIGHTS

Type	Motor	Dimensions mm					Connections	Weight Kg
		L1	L2	L3	D	H		
SPH-DWJT 4-5	Three-Phase Single-Phase	455	188	183	170	225/245	G1 - 1"	17
SPH-DWJT 4-6		482	213	210	170	225/245	G1 - 1"	17
SPH-DWJT 8-4		490	186	168	180	240/270	G2 - 1" 1/4	28
SPH-DWJT 8-5		520	216	198	180	240/270	G2 - 1" 1/4	30